



GM Colorado/Canyon vehicles may come equipped with a variety of factory rear suspension lifts. This document outlines how to confirm a specific vehicle, regardless of trim level, is compatible with the aftermarket air suspension kit.

REQUIREMENT FOR GM COLORADO/CANYON KITS

The air spring present in the air suspension kits is compatible with the vehicle when the distance from the bottom of the jounce bumper to the bottom of the frame (A) is between 6.75" and 8.0".

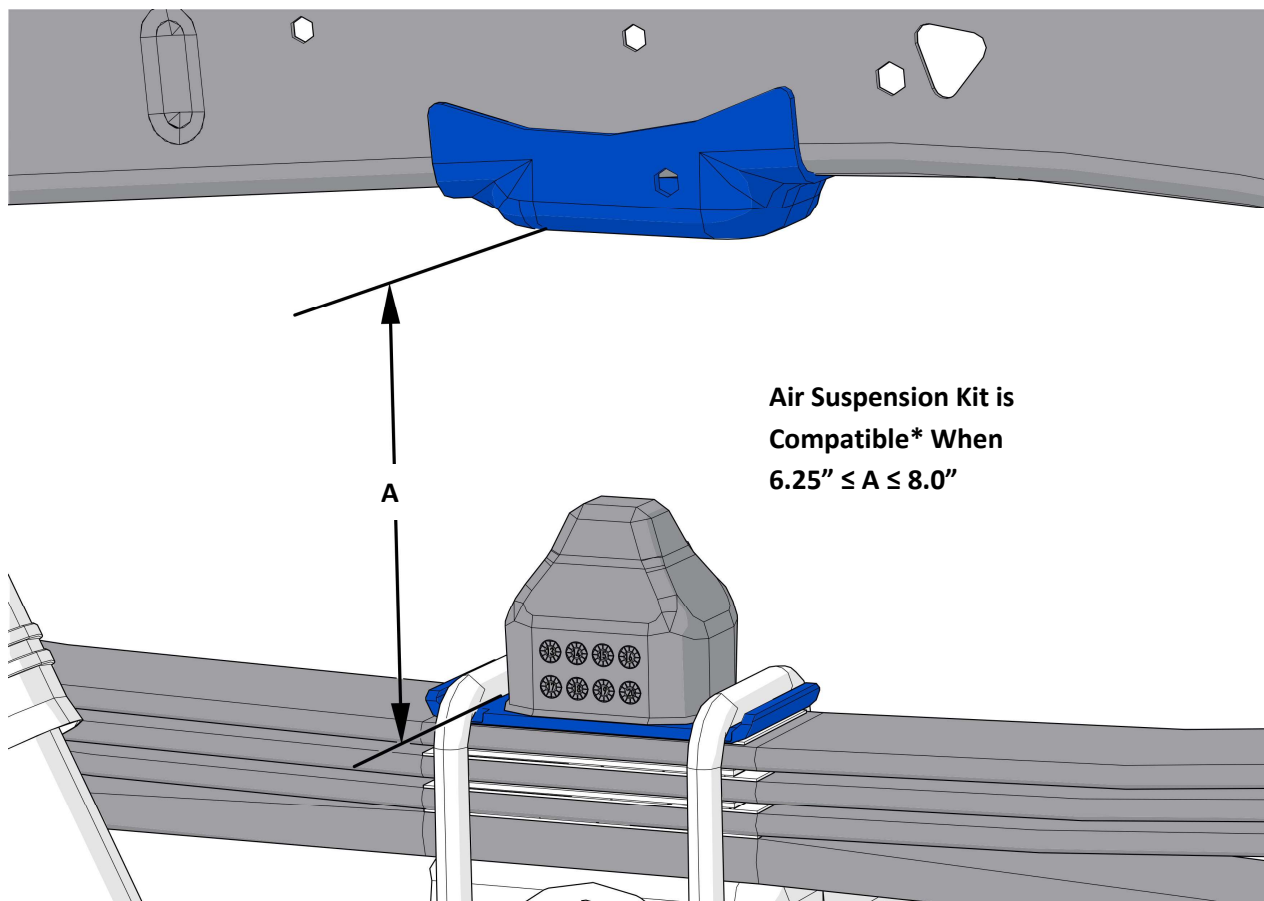


Figure 1. Diagram of GM Colorado/Canyon Rear Suspension

*A vehicle with a distance A in the required range may not be compatible with an air suspension kit due to other factors. Review the complete list of air suspension kit fitment restrictions, if applicable, for the specific GM Canyon/Colorado air suspension kit.

AIR SPRING (HP10199) HEIGHTS – IN GM COLORADO/CANYON AIR SUSPENSION KITS

Data on HP10199 Air Spring	
Minimum Operating Bag Height	2.95" [75 mm]
Maximum Operating Bag Height	9.65" [245 mm]

All information contained in this document is for reference only, subject to change without notice.