

Thank you and congratulations on the purchase of an Air Horn Kit.

IMPORTANT

Some municipalities do not allow the use of air horns on passenger vehicles, please check the regulations in your area before installing this kit.

PLEASE NOTE: An air horn kit requires an onboard air source and an air tank to effectively activate the system.

A minimum 1/2 gallon air tank, with a minimum of 100 PSI and a maximum of 150 PSI, is recommend.

AIR HORN KITS


This manual is used across multiple kits. All kits are universal applications:

Premium Kits - For vehicles <u>without</u> an onboard air system		Basic Kits - For vehicles <u>with</u> an onboard air system	
KIT PART #	KIT DESCRIPTION	KIT PART #	KIT DESCRIPTION
10238	Large Horn	10234	Large Horn
10213	Dual Horns	10073	Dual Horns
10237	Horn Trio	10235	Horn Trio
10314	Triple Train Horn** (See **CAUTION below)	10254	Triple Train Horn** (See **CAUTION below)

INSTALLATION

It is required to install the air horns facing rearward or down to avoid dirt & moisture accumulating in the chambers.

Failure to do so will void the warranty on the air horn assembly

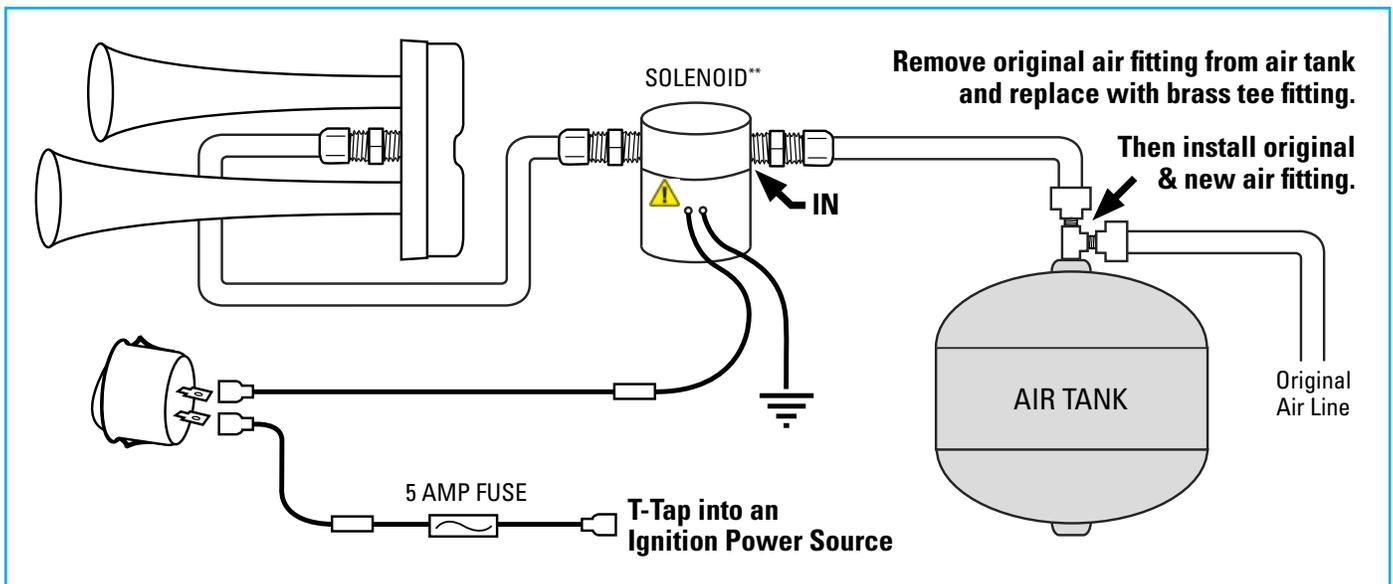

⚠️ **CAUTION: The solenoid included in 10314 / 10254 "Triple Train Horn" kits (Part No: C10613) are polarity-dependent: The BLACK wire must link to ground, the RED wire must link to power. Incorrect wiring will result in immediate failure of the solenoid.

WARRANTY

To be eligible for warranty, the owner must submit their warranty card or register online within 30 days of the purchase date.