


# roubleshooting Guide

**PACBRAKE**

www.pacbrake.com 800.663.0096

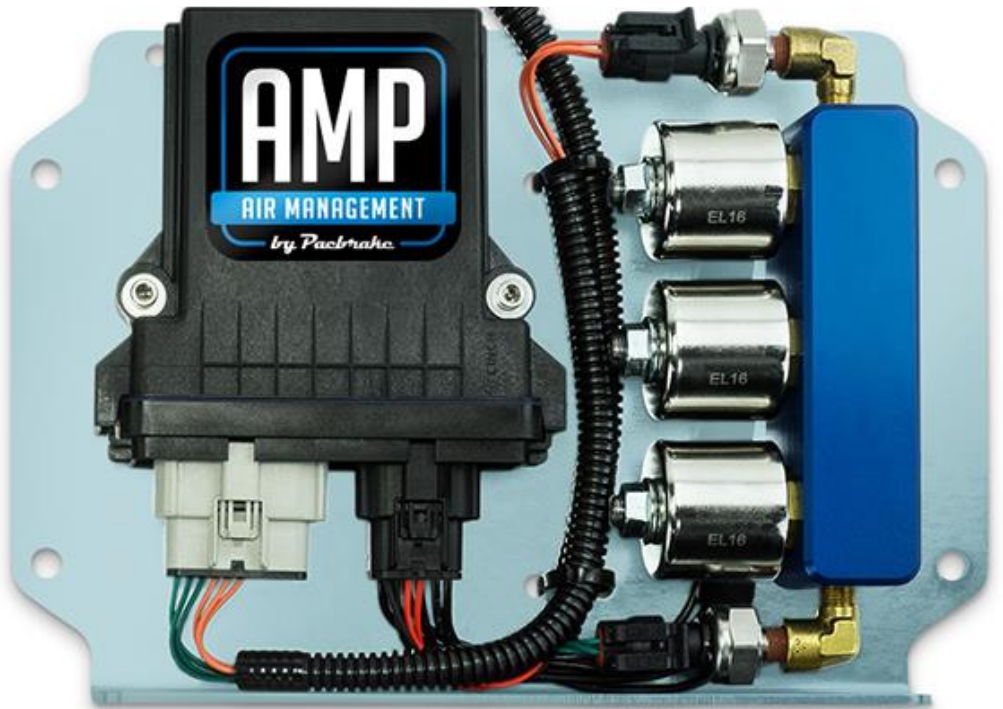

## HP10325 KIT

### AMP Wireless Air Controls

Take control of your air springs through the AMP Wireless Control application. Requires Air Springs and Onboard Air Systems (sold separately)





**IMPORTANT:** Prior to proceeding:

- Ensure all wiring harness and airline connections are secure.
- Inspect all wiring for signs of damage or wear that could cause electrical shorts or discontinuities.

**Cannot connect to the AMP Controller from within the Application**

Cause	Solution
Incorrect/unsupported device or operating system	<ul style="list-style-type: none"> <li>• Ensure the device operates on Android 4.3 (Jellybean) or newer</li> <li>• Ensure the device operates on Apple™ iOS™ 10.3 or newer</li> </ul>
Insufficient power applied to the controller	<ul style="list-style-type: none"> <li>• Ensure the power wires are connected to the correct terminals and the vehicle ignition is on</li> <li>• Check the 10A fuse in the wiring harness</li> </ul>
Communication issue between the controller and the phone	<ul style="list-style-type: none"> <li>• Ensure the controller is within Bluetooth range (10m, 30ft) and that the AMP controller is not mounted within a metal surround (trunk/engine bay)</li> <li>• Certain phones may have difficulty connecting due to internal interference, turn off other wireless communications (Wi-Fi, NFC, etc.) and retry</li> <li>• <b>Android only:</b> ensure that the controller is paired with the mobile device</li> <li>• Ensure Bluetooth is turned on</li> <li>• Ensure Location Services is turned on – Bluetooth requires this permission in order to scan for the controller</li> <li>• Cycle ignition power to reset the controller and refresh the communication</li> </ul>

**Air solenoids are not activating**

Cause	Solution
Insufficient power applied to the controller	<ul style="list-style-type: none"> <li>• Ensure the power wires are connected and the vehicle ignition is on</li> <li>• Check the 10A fuse in the wiring harness</li> </ul>
Solenoids have frozen	<ul style="list-style-type: none"> <li>• Humidity in the air may condense and freeze at low temperatures</li> </ul>

**System does not hold pressure**

Cause	Solution
A leak may exist in one or more of the connections.	<ul style="list-style-type: none"> <li>• Spray soap water on all airline connections to detect any air leaks. Repair as necessary and retest</li> </ul>

**Air springs will not stop filling or draining**

Cause	Solution
App/signal connection is dropping intermittently	<ul style="list-style-type: none"> <li>• Ensure the controller is within Bluetooth range and that the AMP controller is not mounted within a metal surround (trunk/engine bay)</li> </ul>

**App shows pressure in the Air Springs when empty**

Cause	Solution
Pressure sensors are out of calibration	<ul style="list-style-type: none"> <li>Recalibrate</li> </ul>

**Air springs fill or drain unevenly**

Cause	Solution
Air lines between the AMP wireless control board and the Air Springs are different lengths	<ul style="list-style-type: none"> <li>Adjust the length of the lines to be equal</li> </ul>

**Air springs fill or drain in opposite orientation**

Cause	Solution
Air lines are plugged into the incorrect LEFT and RIGHT ports	<ul style="list-style-type: none"> <li>Swap LEFT and RIGHT airlines by pressing down the collar of the fittings to remove the lines</li> </ul>

**Legal**

- Apple, the Apple logo, iPhone, and iPod touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc., registered in the U.S. and other countries.
- Google Play and the Google Play logo are trademarks of Google LLC
- Android is a trademark of Google LLC
- The Android robot is reproduced or modified from work created and shared by Google and used according to terms described in the Creative Commons 3.0 Attribution License.